

KR Electronics, Inc.

General Description


KR 3202-2-BNC is a 2 MHz lowpass filter. The filter has a minimum 0.5 dB bandwidth of 2 MHz and is designed for a source and load impedance of 50 Ω . Other passband frequencies are available. Please consult the factory.

Features

- 2 MHz Lowpass Filter
- Sharp Transition to Stopband
- Elliptic Response
- Flat Passband Response
- BNC Connectors
- Other configurations available

Typical Performance

Overall Response (5 dB/div)

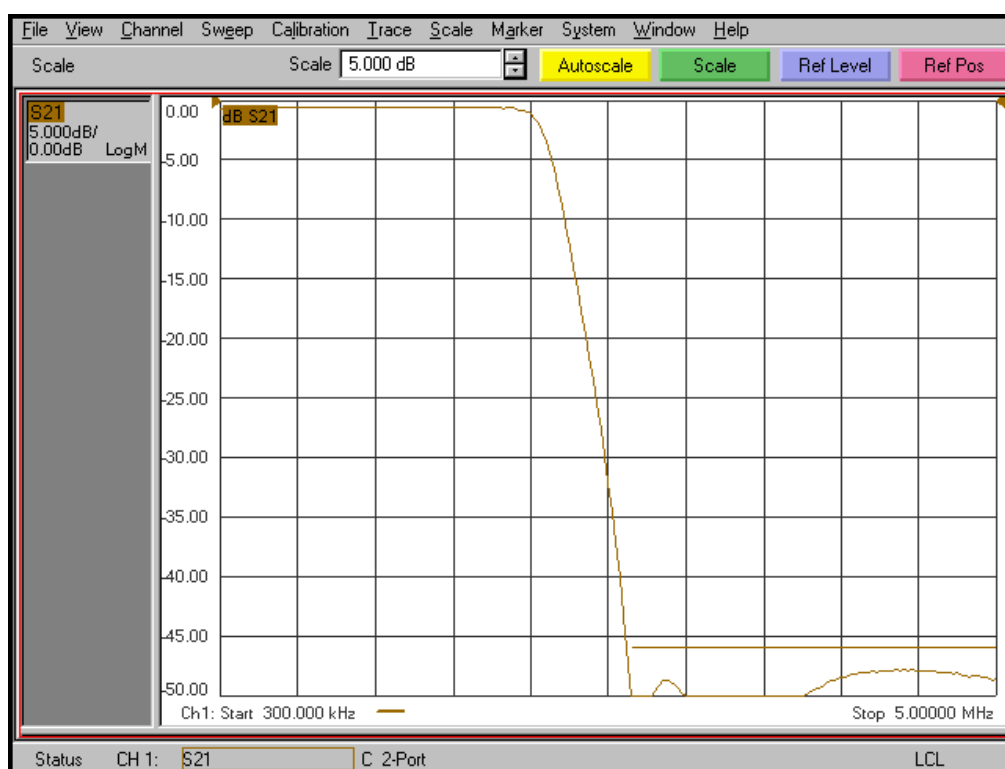


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

Typical Performance

Passband Amplitude (1 dB/div)

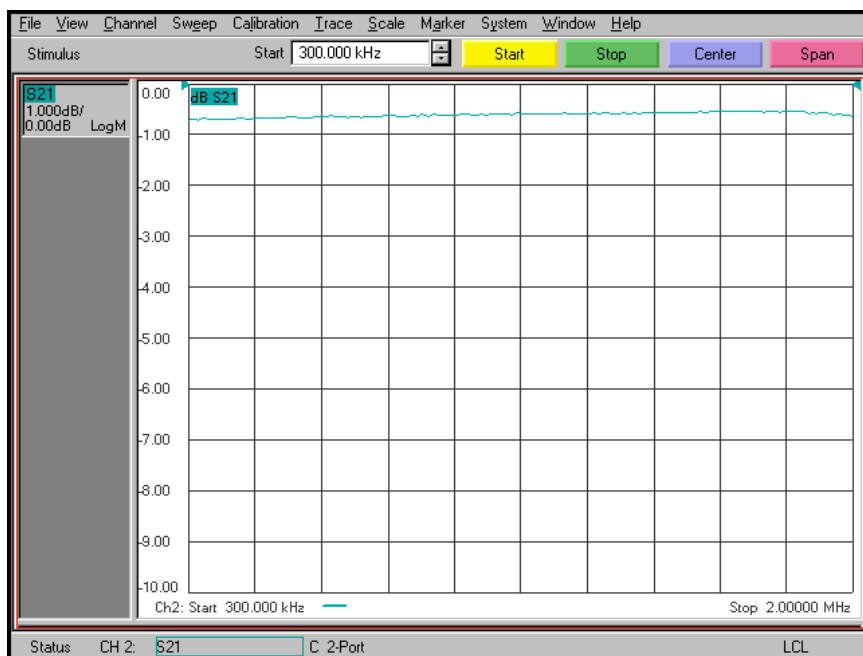

Overall Response (10 dB/div)

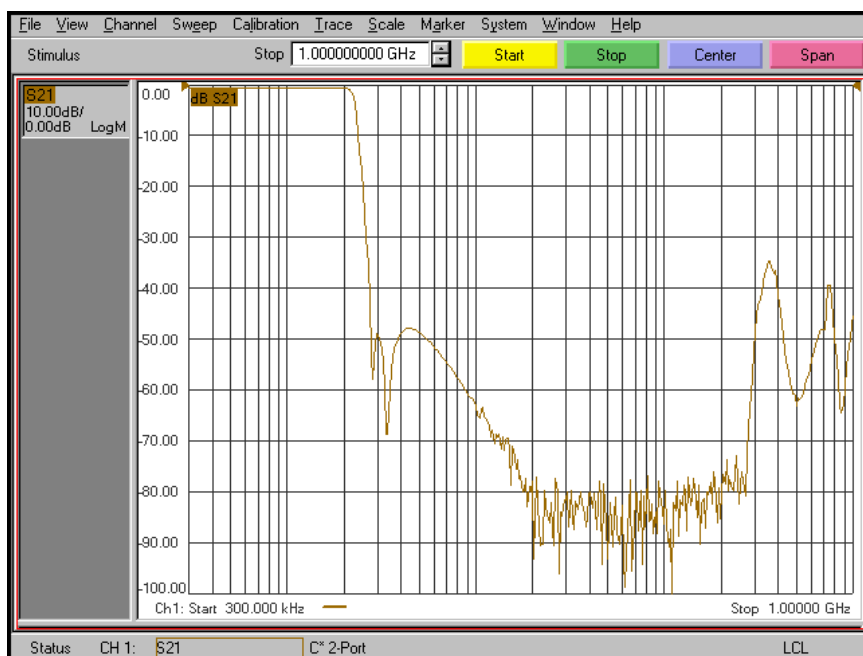


KR Electronics 3202-2-BNC

Specifications

Parameter	Specification	Notes
Filter type	Lowpass	
Insertion Loss at 100 KHz	1 dB max	
Passband Flatness to 2 MHz	0.5 dB pk-pk	
Stopband Rejection at 2.8 MHz	45 dB min	
Source and Load	50 Ω	

Physical Dimensions

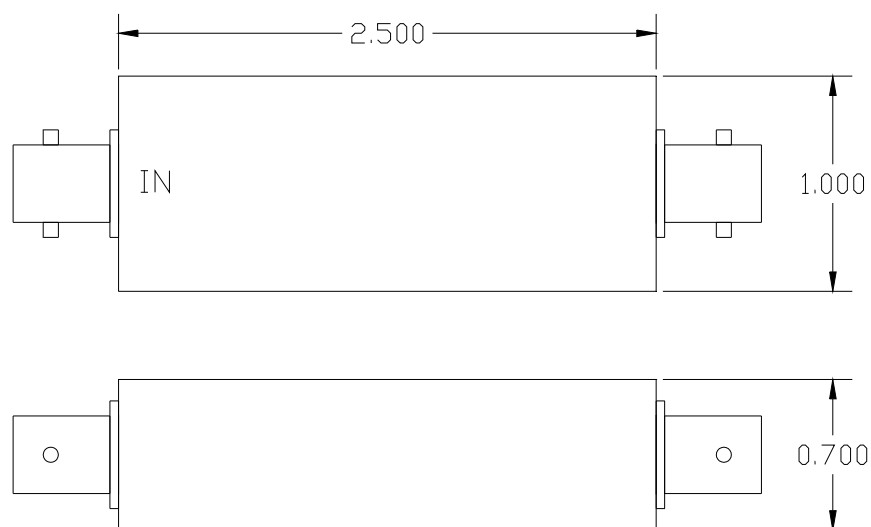

Notes:

1. Dimensions in inches
2. BNC(F)/BNC(F) Connectors
3. Rectangular case

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982